

5511M Sealant



Polymer Based Pumpable Sealant

Exhibits excellent adhesion to most non-porous surfaces

- Airtight, watertight, flexible seal for metal-to-metal concealed joints
- Capable of withstanding joint movement without cracking
- Non-skinning, non-oxidizing product
- Indefinite shelf life
- Ideal for sealing longitudinal seams



5511M Sealant

Polymer Based Pumpable Sealant

DESCRIPTION

A non-skinning, non-drying synthetic polymer based pumpable sealant.

BASIC USE

5511M was developed to provide an airtight, watertight, flexible seal for metal-to-metal concealed joints. As a non-skinning, non-drying sealant, 5511M has been specifically formulated for precise application to panel joints at the roll forming line.

SPECIAL CHARACTERISTICS

Exhibits excellent adhesion to most non-porous surfaces.

A non-skinning, non-oxidizing product capable of withstanding joint movement without cracking.

Pumping consistency particularly efficient for leak proofing concealed metal joints.

LIMITED PRODUCT WARRANTY

Ductmate warrants that 5511M Sealant, when properly installed and maintained, will be free from defects in material and workmanship, and will comply with all written specifications made by Ductmate at the time of sale. Ductmate's warranty shall run for a period of one year from the date of manufacture.

Warranty Limitation


The warranty stated above is in lieu of all other warranties, express or implied, including but not limited to the implied warranties of MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Although Ductmate may have suggested the product, or provided written or oral advice to the Purchaser, it is the Purchaser's responsibility to test and determine the suitability of 5511M Sealant, for the intended use and purpose, and Purchaser and/or its customer assumes all risk and liability whatsoever regarding such suitability.

Limitation of Liability

In the event of a breach of the above warranty, Ductmate's sole obligation, and Purchaser's sole and exclusive remedy, shall be, at Ductmate's option, repair or replacement of any defective products, or refund of an applicable portion of the purchase price. Ductmate shall have no liability for costs of removal or reinstallation of the product. The Purchaser agrees that no other remedy, including but not limited to loss of profits, loss sales, injury to person or property, or any other special, incidental or consequential damages, shall be available to the Purchaser for any claim arising out of this Agreement, regardless of whether such claim is made in contract or in tort, including strict liability in tort. In no event will Ductmate be obligated to pay damages to the Purchaser in any amount exceeding the purchase price that the Purchaser paid to Ductmate for the allegedly defective product.

TECHNICAL INFORMATION

% SOLIDS:	≥ 90%
COLOR:	Off white to grey
WEIGHT:	12.7 lbs ± 0.3
SHELF LIFE:	Indefinite (unopened container)
SERVICE TEMPERATURE:	0°F to 200°F
EXTRUDABILITY:	4 s/mL (Approximately) <i>ASTM D2452</i>
SLUMP:	0 - 0.1 inches <i>ASTM D2202</i>
APPLICATION METHOD:	Hand or power pump equipment
PACKAGING:	5 U.S. Gallon Pails (19 L) 55 U.S. Gallon Drums (208 L)

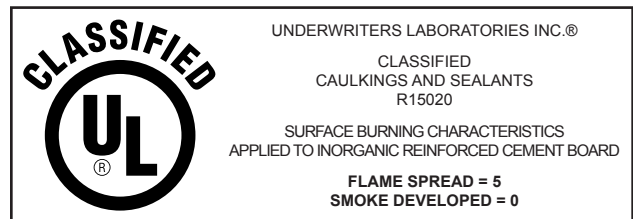

Charleroi, PA
210 Fifth Street
Charleroi, PA 15022
724-258-0500

Lodi, CA
810 S. Cluff Avenue
Lodi, CA 95240-9141
209-333-4680

*Additional Manufacturing and Warehousing in
Monongahela, PA and Wagoner, OK*

1-800-245-3188 • www.ductmate.com

© Copyright Ductmate Industries, Inc. All rights reserved.



Ductmate Is A Proud Member Of The Following Organizations:



Distributed By: