


# ISOLATION HANGER

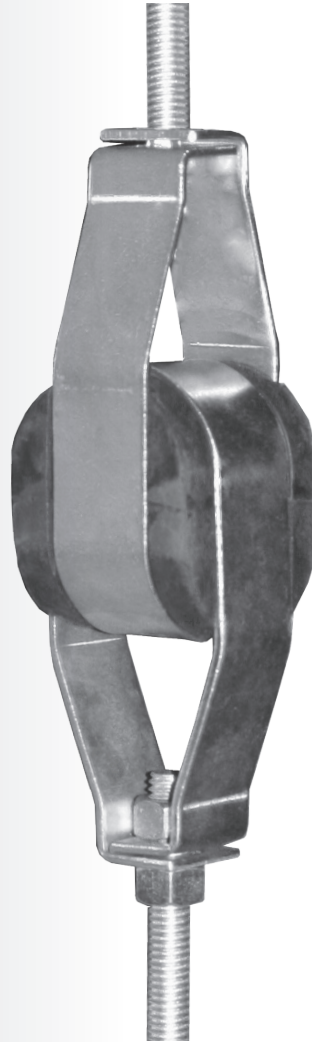

## Vibration Isolating Hanging Bracket

**Supports Up To 1100 Pounds!**

- Rubber prevents vibration noise transmission from air ducts and other ventilation devices to parts of the building.
- The load-bearing capacity of the hanger can be used to its full extent.



**DUCTMATE<sup>®</sup>**  
Industries, Inc.

# Isolation Hanger

## Vibration Isolating Hanging Bracket

### DESCRIPTION

The Isolation Hanger is a sturdy steel suspension bracket with a rubber isolation pad.

### BASIC USE

An Isolation Hanger can be used with threaded rods for suspension of ductwork and other equipment in order to isolate vibration to its source.

### COMPONENTS & FEATURES

- A) The open space corresponds to the width of the nut, preventing the nut from turning.
- B) The sturdy tension brackets have a much greater load-bearing capacity than the corresponding threaded rods.
- C) The rubber padding prevents vibrations from being transmitted.
- D) The dimension on the outside corresponds to an ordinary wrench size. No special tools are required.

### TECHNICAL INFORMATION

Finish/Coating: Zinc Electroplated to 10-15 Microns

Rubber Type: Styrene-butadiene

Durometer Hardness: 75-85 Shore Hardness

Max Temp: 194°F

Min Temp: -22°F

Use with 3/8" threaded rod.


Load-bearing Capacity: 1100 lbs. (500kg)\*  
*\*680 lbs. (308kg)*  
*Maximum Allowable Load With 3/8" Rod*

Overall Length: 5 7/8" (150mm)

Max. Width: 1 13/16" x 1 13/16"  
 (45mm x 45mm)

### PACKAGING INFORMATION

Item #	Description	Packing Unit	Unit Weight
DM 2723 SI	Isolation hanger SI 3/8"	50 Pieces	37 lbs.

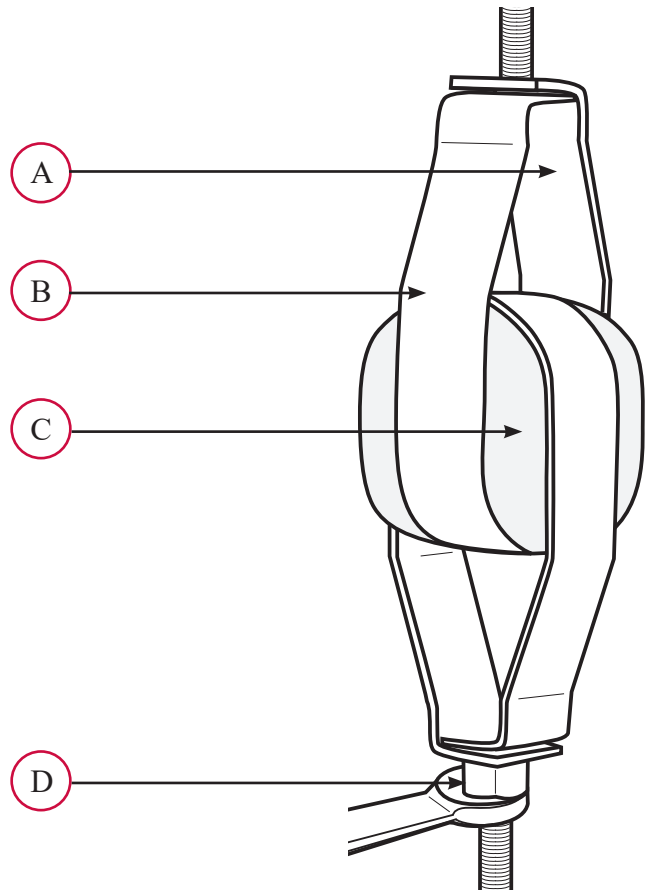

### LIMITED PRODUCT WARRANTY

Ductmate warrants that the Isolation Hanger, when properly installed and maintained, will be free from defects in material and workmanship, and will comply with all written specifications made by Ductmate at the time of sale. Ductmate's warranty shall run for a period of one year from the date of manufacture.

#### Warranty Limitation

The warranty stated above is in lieu of all other warranties, express or implied, including but not limited to the implied warranties of MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Although Ductmate may have suggested the product, or provided written or oral advice to the Purchaser, it is the Purchaser's responsibility to test and determine the suitability of the Isolation Hanger, for the intended use and purpose, and Purchaser and/or its customer assumes all risk and liability whatsoever regarding such suitability.

#### Limitation of Liability

In the event of a breach of the above warranty, Ductmate's sole obligation, and Purchaser's sole and exclusive remedy, shall be, at Ductmate's option, repair or replacement of any defective products, or refund of an applicable portion of the purchase price. Ductmate shall have no liability for costs of removal or reinstallation of the product. The Purchaser agrees that no other remedy, including but not limited to loss of profits, loss sales, injury to person or property, or any other special, incidental or consequential damages, shall be available to the Purchaser for any claim arising out of this Agreement, regardless of whether such claim is made in contract or in tort, including strict liability in tort. In no event will Ductmate be obligated to pay damages to the Purchaser in any amount exceeding the purchase price that the Purchaser paid to Ductmate for the allegedly defective product.



**Charleroi, PA**  
 210 Fifth Street  
 Charleroi, PA 15022  
 724-258-0500

**Lodi, CA**  
 810 S. Cluff Avenue  
 Lodi, CA 95240-9141  
 209-333-4680

*Additional Manufacturing and Warehousing in  
 Monongahela, PA and Wagoner, OK*

1-800-245-3188 • [www.ductmate.com](http://www.ductmate.com)

© Copyright Ductmate Industries, Inc. All rights reserved.



Ductmate Is A Proud Member Of The Following Organizations:



Distributed By: